

Product Description

HYOSUNG Polypropylene HB242PA is specially designed polypropylene block copolymer that features high stiffness and higher oxidation induction time (OIT). It is suitable for non-pressure pipes including sewage and drainage pipes and fittings. **PP HB242PA** complies with regulation ISO/DIS 15874 hydrostatic pressure requirements and WRAS B56920 drinking water certified.

Application

Sewage and drainage pipes
 (Solid and double wall pipes)
 Fittings for sewage and drainage pipes

Features

High stiffness and impact resistance
 WRAS B56920 certified

Properties

Properties	Test Method	Typical Value	Unit
Resin Properties			
Melt Index(230°C, 2.16kg)	ASTM D1238	0.3	g/10min
Density	ASTM D792	0.90	g/cm ³
Mechanical Properties			
Tensile Strength at Yield	ASTM D638	340	kg/cm ²
Flexural Modulus	ASTM D790	18,000	kg/cm ²
Izod Impact Strength, Notched at 23°C	ASTM D256	N.B	kg·cm/cm
Izod Impact Strength, Notched at -10°C	ASTM D256	8.0	kg·cm/cm
Rockwell Hardness	ASTM D785	95	R-Scale
Heat Deflection Temperature (0.45MPa)	ASTM D648	120	°C
VICAT Softening Temperature (10N)	ASTM D1525	155	°C

* The values listed above are typical values for reference purpose only and shall not be construed as specifications.


Storage and Handling

This product should be stored in dry condition at temperature below 40°C and protected from UV-light. When condensation is visible or can be expected, pre-drying is recommended. (Drying condition: 80~100°C / 2~4hours at air circulated condition)

Contacts

Head Office (06578) 235, Banpo-daero, Seocho-gu, Seoul, KR
 Tel: +82-2-2146-5439
Online www.hyosungchemical.com

Processing Parameters

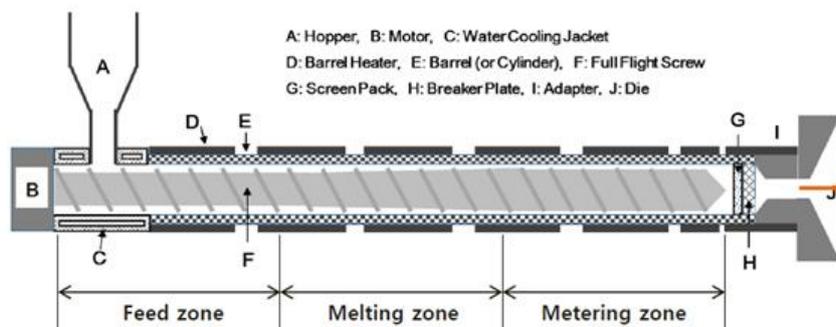

Specifications	Unit	Recommended Parameters
Feed Zone Temperature	°C	170 ~ 190
Melting Zone Temperature	°C	190 ~ 225
Metering Zone Temperature	°C	200 ~ 235
Die or Nozzle Temperature	°C	200 ~ 235
Screw Speed	rpm	20 ~ 30

Considerations

Due to variations in screw design and heat efficiency according to types of facilities, optimal conditions for each facility may differ. Therefore, the optimal temperature conditions for each facility must be taken into consideration depending on thickness of final products, extruding pressure, cooling efficiency, changes in MI of the final product, appearances of the final product, and others.

Health, Safety and Food Contact Regulations

PP HB242PA complies with FDA requirements in the code of Federal Regulations in 21 CFR 177. 1520 for food contact and European Commission Regulation (EU) No 10/2011 and its amendments up to (EU) No 2023/1627 with regard to plastic materials and articles intended to come into contact with food.

Disclaimer

All information, including product characteristics, applications and properties are for reference purpose only and shall not be construed as specifications. Before using this product, customers should carefully review the instructions for use of the product to determine whether the product is suitable for the customer’s particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of this product. HYOSUNG CHEMICAL CORPORATION assumes no legal responsibility or liability for the contents of this document. We reserve the right to change the contents of this document without prior notice. This document is copyrighted by HYOSUNG CHEMICAL CORPORATION.

Contacts

Head Office (06578) 235, Banpo-daero, Seocho-gu, Seoul, KR
Tel: +82-2-2146-5439

Online www.hyosungchemical.com